

MDR-3L2

US Model
Canadian Model
AEP Model
UK Model
E Model



STEREO HEADPHONES

SPECIFICATIONS


Type:	Dynamic
Driver Units:	23 mm dia., dome
Impedance:	35 Ω at 1 kHz
Sensitivity:	96 dB/mW
Rated Power:	0.15 W
Power Handling Capacity:	0.1 W
Frequency Response:	40 – 20,000 Hz
Cord Length:	2 m long with mini plug
Weight:	Approx. 45 g (without cord)

SONY[®]
SERVICE MANUAL

1. DISASSEMBLY


Note: Follow the disassembly procedure in the numerical order given.

UNIT REMOVAL

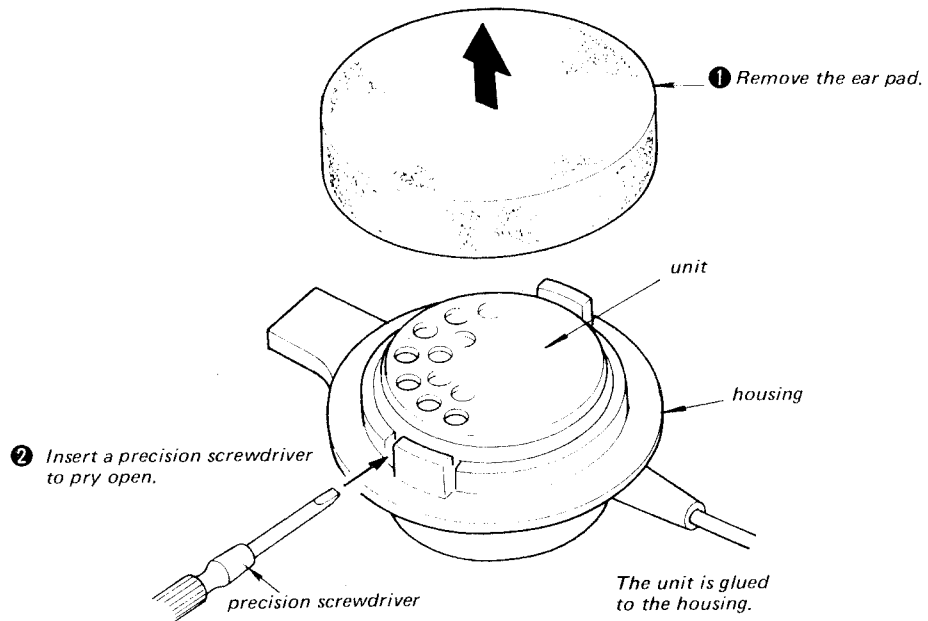


CORD REPLACEMENT

The replacement of the cord should be done after the ornamental cover removal. (The ornamental cover is glued to the hanger.)

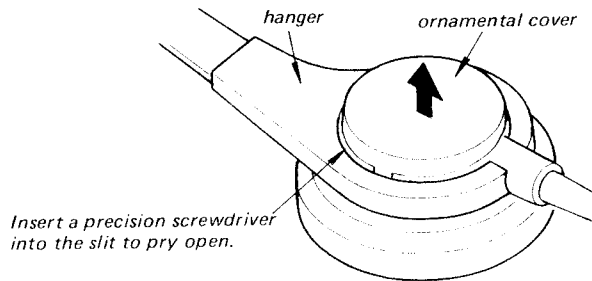


WIRING DIAGRAM

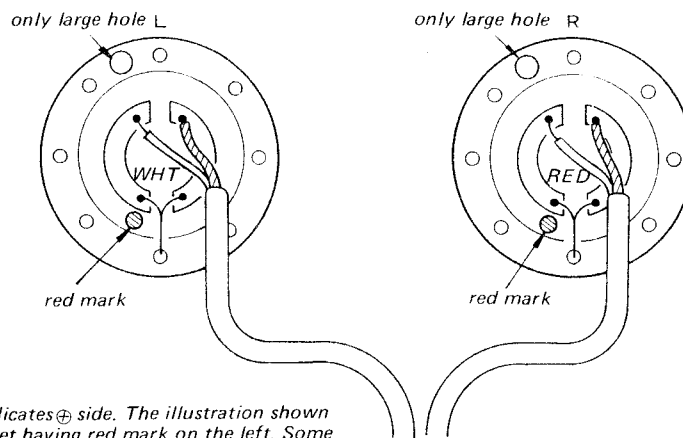

Red mark indicates ⊕ side. The illustration shown above is the set having red mark on the left. Some sets have red mark on the right.

2. EXPLODED VIEW

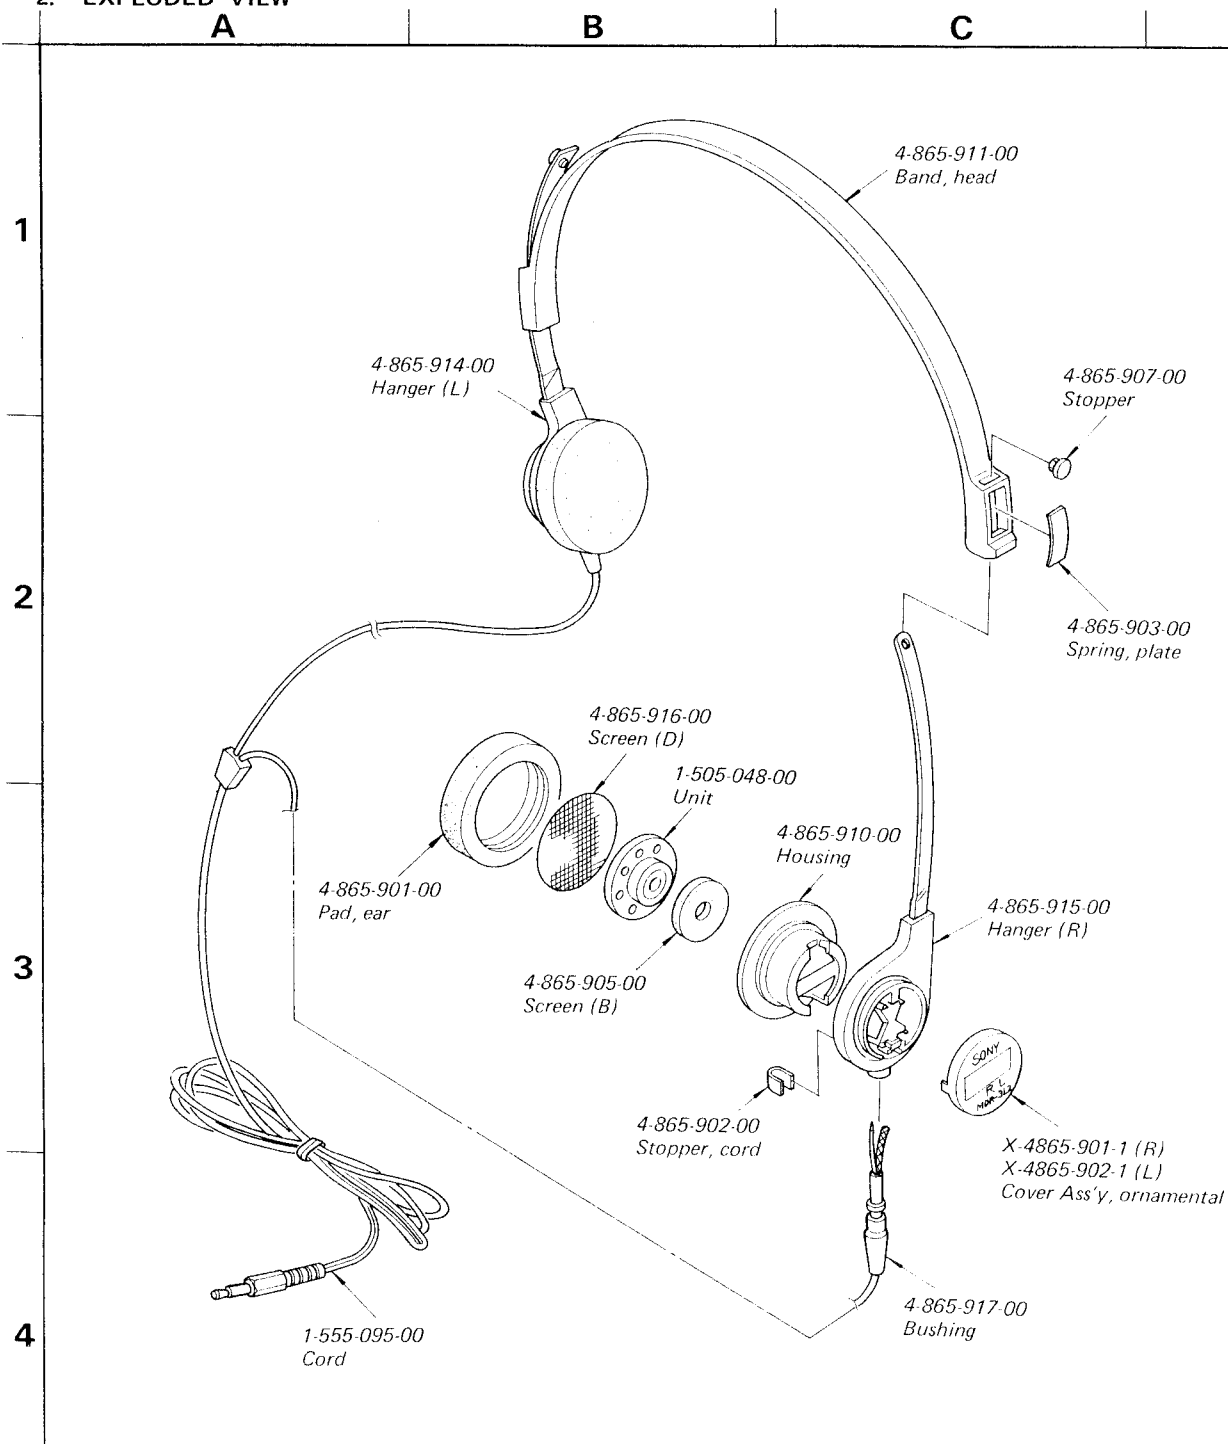

ACCESSORIES AND PACKING MATERIALS

<u>Part No.</u>	<u>Description</u>
1-506-400-00	Adaptor, plug
3-701-624-00	Bag
3-770-997-11	Manual, instruction
4-865-919-00	Carton
3-568-738-00	Bag, polyethylene (headphone)